





NOTES:  
 Current Rating:.1.0AMP  
 Withstand Voltage:500V AC/DC  
 Contact Resistance:20mΩ Max  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze or Brass  
 Contact Plating:Au or Sn over Ni  
 Insulator Material:PA6T/PA9T/LCP+30%G.F (UL94V-0)

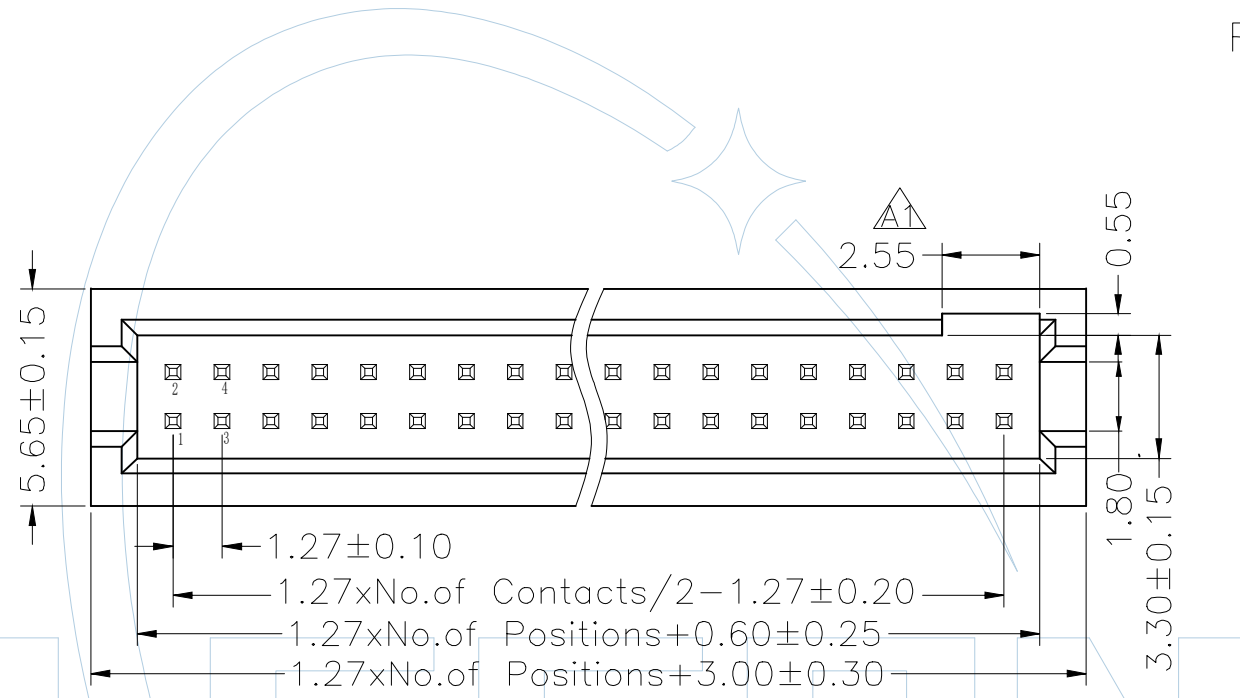



Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

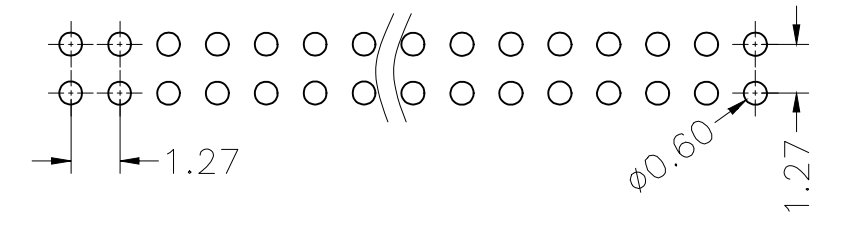

### Ordering Information

BHC131-XX S XX B K00 X 1

- No. of Pins: 08 30, 10 34, 14 40, 16 44, 20 50, 24 60, 26 64
- Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- Color: B=Black
- Packing: A=Tray, T=Tube

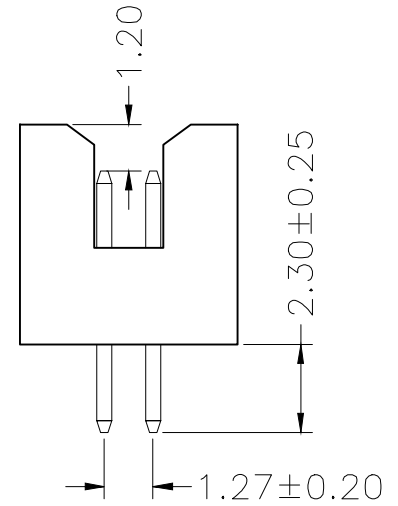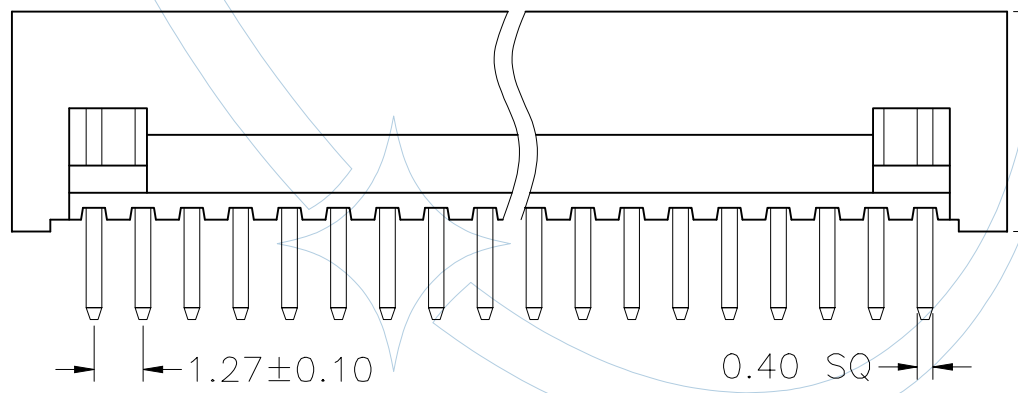

ITEM	Pitch	Mating
Standard	1.27	FHB344
Alternate		

				ENGINEERING		DRAW		SCALE		FREE		PART NO.		 Dongguan YILI Electronic Technology Co., Ltd Tel: FAX: E-mail: <a href="http://www.ylcon.cn">http:// www.ylcon.cn</a>	
				X.X	±0.40	DESIGN		UNIT	mm	TITLE:		BHC131-XXSXXBK00X1			
				X.XX	±0.25	CHECK		SIZE	A3	1.27mm 筒牛 180°		Customer NO.			
				X.XXX	±0.15	APPROVE		SHEET	1/1						
				Angle	± 3°			PROJ.	☒						
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL								