







NOTES:

Current Rating: 1.0AMP  
 Withstand Voltage: 1000V AC/DC  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze or Brass  
 Contact Plating: Au or Sn over Ni  
 Insulator Material: PA6T/PA9T/LCP+30% F (UL94V-0)

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

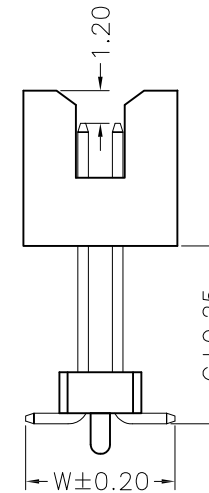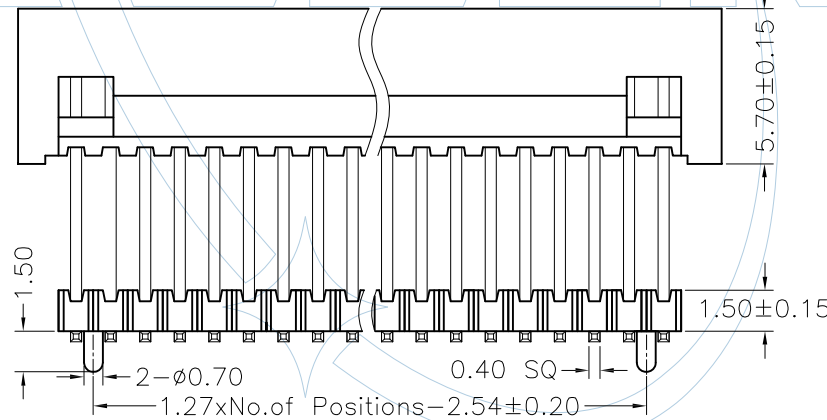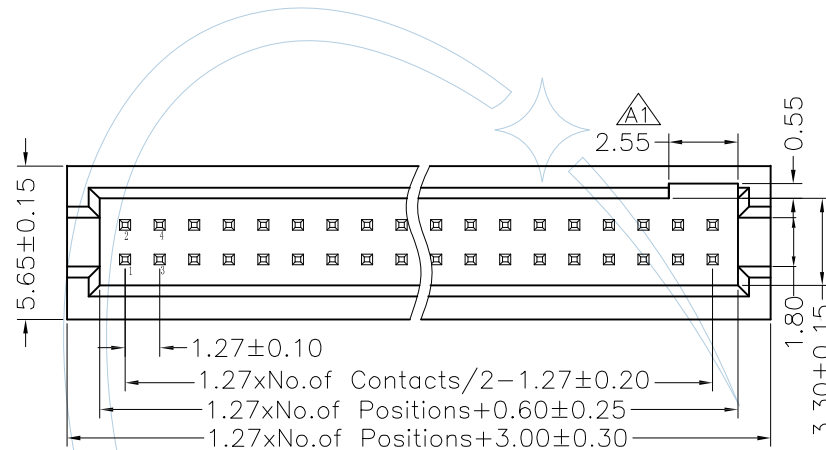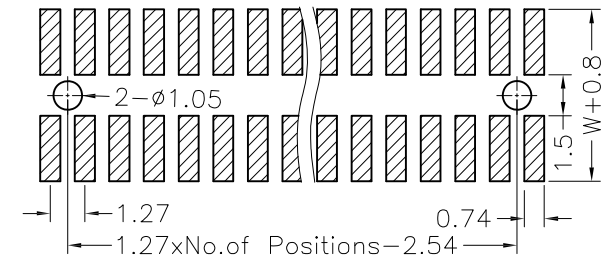

Ordering Information

BHC131-XX M XX B D00 X 2

- No. of Pins: 08 30, 10 34, 14 40, 16 44, 20 50, 24 60, 26 64
- Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- Color: B=Black
- Packing: A=Tray, T=Tube

ITEM	Pitch	Mating
Standard	1.27	FHB344
Alternate		

Dimension antitheses list		
ITEM	A	C
Standard	6.60	5.50
Alternate		

				ENGINEERING		DRAW		SCALE		FREE		PART NO.		 Dongguan YILI Electronic Technology Co., Ltd Tel: FAX: E-mail: <a href="http://www.ylccon.cn">http:// www.ylccon.cn</a>	
				X.X	±0.40	DESIGN		UNIT	mm	TITLE:		BHC131-XXMXXBD00X2			
				X.XX	±0.25	CHECK		SIZE	A3	1.27mm筒牛加塑胶SMT带柱		Customer NO.			
				Angle	± 3°	APPROVE		SHEET	1/1	PROJ.		Ⓜ Ⓢ			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE										
1		2		3		4		5		6		7		8	