





Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

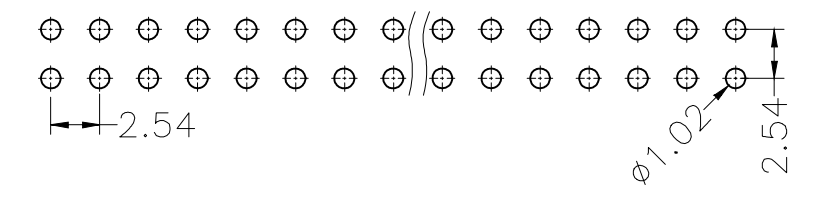

NOTES:  
Current Rating: 3.0AMP  
Withstand Voltage: 500V AC/DC  
Contact Resistance: 20mΩ Max  
Insulation Resistance: 1000MΩ Min  
Operation Temperature: -40°C to +105°C



Contact Material: Phosphor Bronze or Brass  
Contact Plating: Au or Sn over Ni  
Insulator Material: PA6T/PA9T/LCP+30%G.F (UL94V-0)

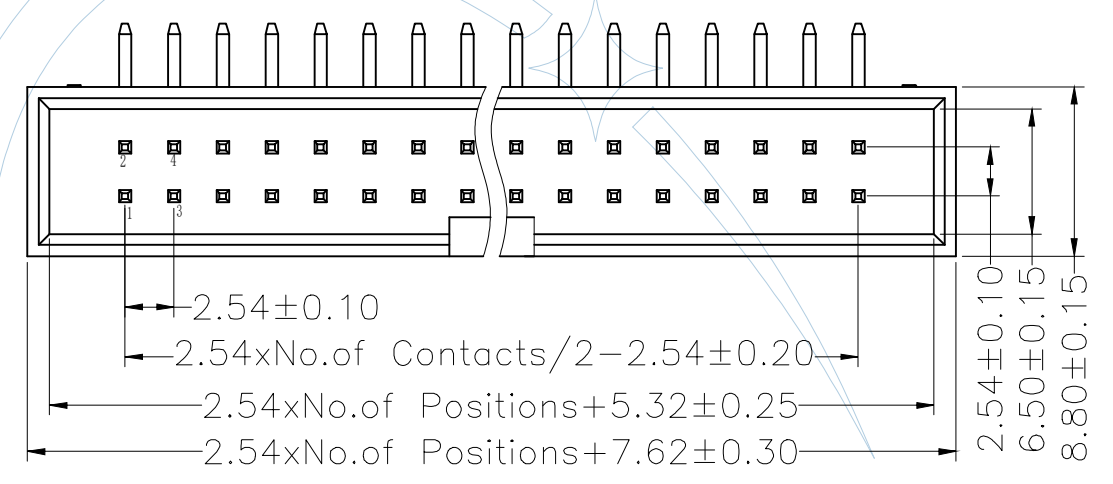

### Ordering Information

EJC110-XX R XX B K00 X 1

- No. of Pins: 08 30, 10 34, 14 40, 16 44, 20 50, 24 60, 26 64
- Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- Color: B=Black, U=Blue, E=Gray (413C), G=Gray (427C)
- Packing: A=Tray, T=Tube

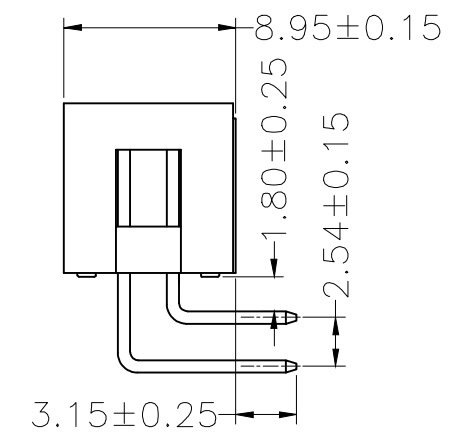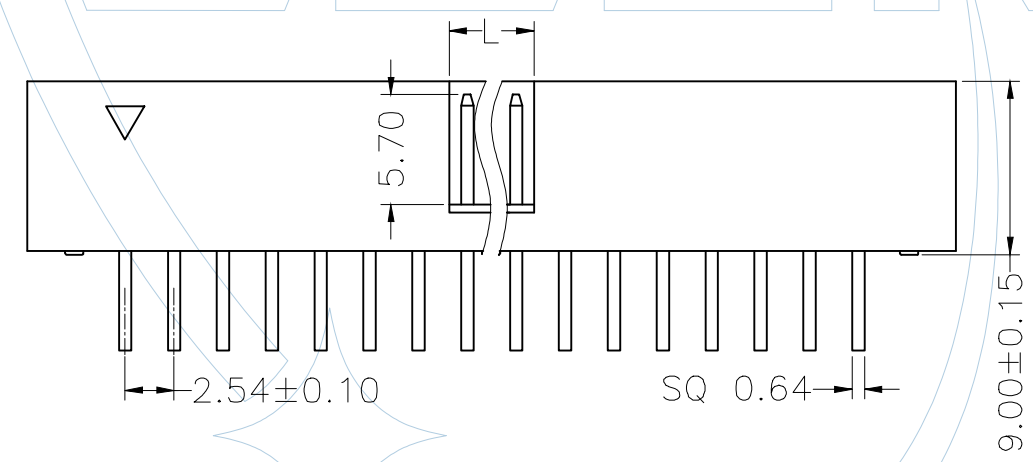

ITEM	Pitch	Mating
Standard	2.54	IDCE211/E212/FHB185
Alternate		

NO. Pin	L	
6P-8P	4.00	
10P-64P	4.40	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	ENGINEERING		DRAW	SCALE	FREE	PART NO. EJC110-XXXXBK00X1
					DIM	TOL				
					X.X	±0.40				TITLE: 2.54mm 筒牛 90° H=9.0
					X.XX	±0.25			UNIT mm	
					X.XXX	±0.15			SIZE A3	
					Angle	± 3°			SHEET 1/1	
									PROJ.	Customer NO.

**YLCCON**  
Dongguan YILI Electronic Technology Co., Ltd

Tel:  
FAX:  
E-mail:  
[http:// www.ylcon.cn](http://www.ylcon.cn)