HF

RoHS

NOTES:
Current Rating:.2.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze or Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA6T/PA9T/LCP+30%G.F (UL94V-0)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

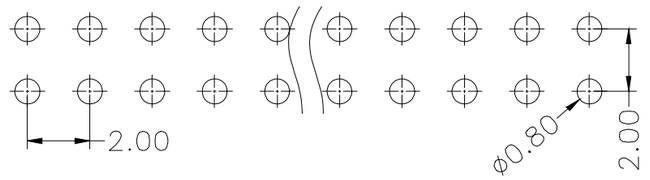

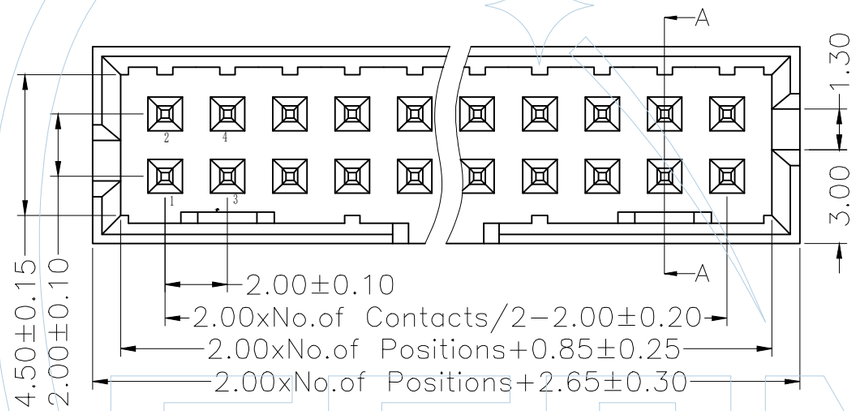

Ordering Information

BHC121-XX S XX B K00 X 1

No. of Pins	Contact Plating:	Color	Packing
08 30	G0=Gold Flash	B=Black	A=Tray
10 34	G1=3u″Gold	U=Blue	T=Tube
14 40	G2=5u″Gold	E=Gray(413C)	
16 44	G3=10u″Gold	G=Gray(427C)	
20 50	G4=15u″Gold		
24 60	G5=30u″Gold		
26 64	S0=Gold Flash/Tin		
	S1=3u″Gold/Tin		
	S2=5u″Gold/Tin		
	S3=10u″Gold/Tin		
	S4=15u″Gold/Tin		
	S5=30u″Gold/Tin		
	SN=Tin		

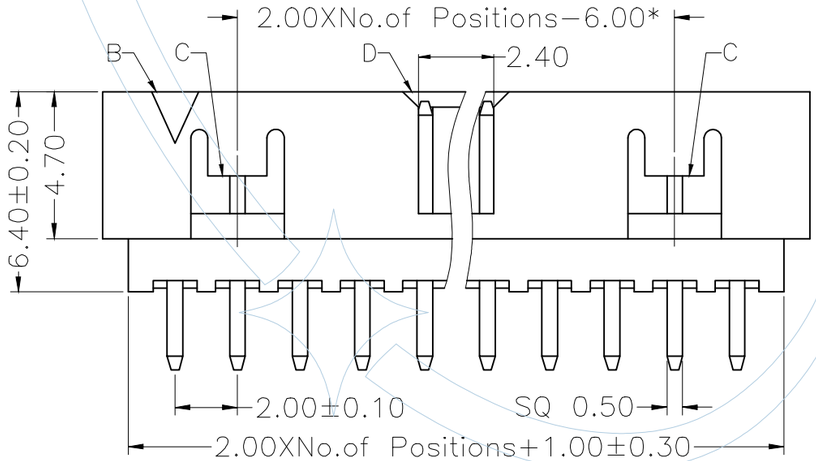

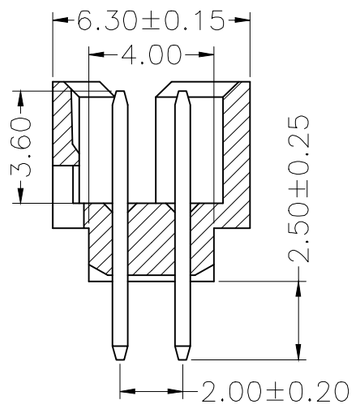

SECTION A-A

ITEM	Pitch	Mating
Standard	2.0	IDCE226
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

ENGINEERING	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW		
DESIGN		
CHECK		
APPROVE		

SCALE	FREE
UNIT	mm
SIZE	A3
SHEET	1/1
PROJ.	

PART NO.
BHC121-XXSXXBK00X1

TITLE:
2.0mm 简牛180° H=6.4

Customer NO.

YLCCON
Dongguan YILI Electronic Technology Co., Ltd

Tel:
FAX:
E-mail:
http:// www.ylccon.cn