



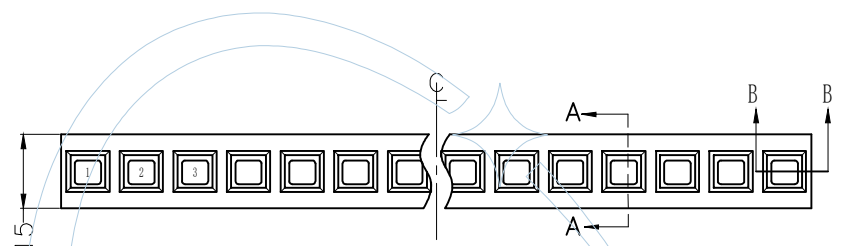

Recommended P.C.B Layout(TOP Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
Current Rating:.1.0AMP
Withstand Voltage:1000V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze or Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA6T/PA9T/LCP+30%G.F (UL94V-0)

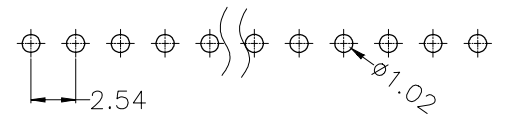

Ordering Information

FHB168-1 XX S XX 6UN X X



No. of Pins
02-40

Contact Plating:
G0=Gold Flash
G1=3u"Gold
G2=5u"Gold
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S1=3u"Gold/Tin
S2=5u"Gold/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SW=Tin

6=PA6T
9=PA9T

Series No.
1=Type1
2=Type2

Packing
T=Tube+Cap
R=Tape&Reel+Cap

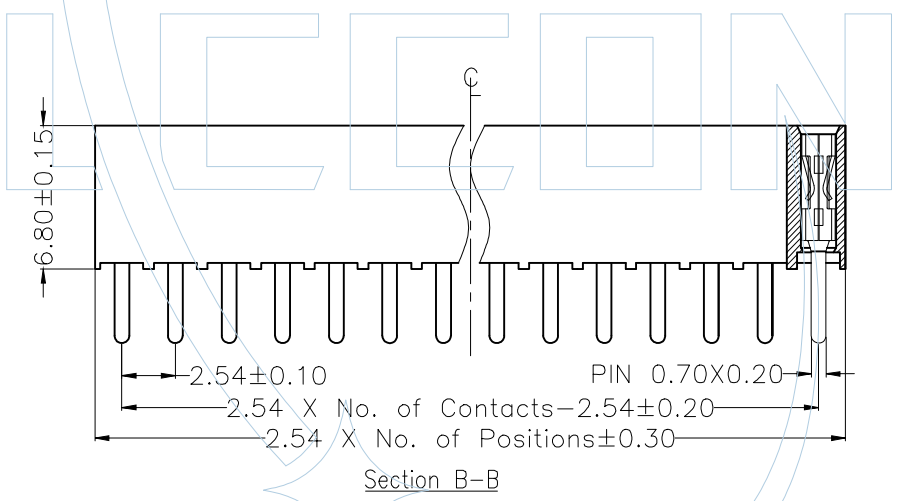

ITEM	Pitch	Mating
Standard	2.54	PHA125/PHA120/PHA115
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	ENGINEERING		DRAW	SCALE	FREE	PART NO. FHB168-1XXSXX6UNXX
					X.X	±0.40				
					X.XX	±0.25	DESIGN			TITLE: 2.54mm排母 单排上插式 H=6.8
					X.XXX	±0.15	CHECK			Customer NO.
					Angle	± 3°	APPROVE			
					DIM	TOL				

YLCCON
Dongguan YILI Electronic Technology Co., Ltd

Tel:
FAX:
E-mail:
[http:// www.ylcon.cn](http://www.ylcon.cn)