





Recommended P.C.B Layout(TOP Side)
(PCB BOARD TOLERANCE±0.05)

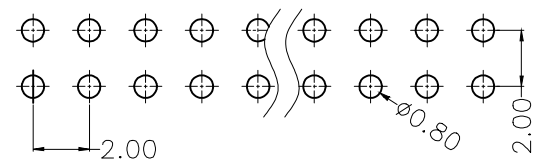

NOTES:
Current Rating:.1.0AMP
Withstand Voltage:1000V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C



Contact Material:Phosphor Bronze or Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA6T/PA9T/LCP+30%G.F (UL94V-0)

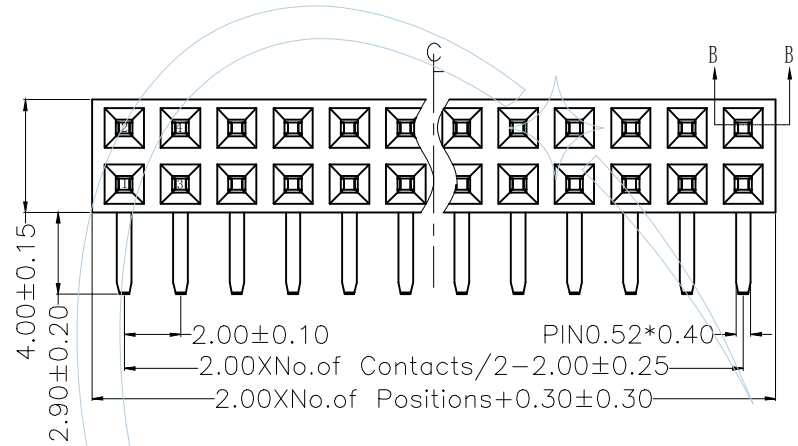

Ordering Information

FHB263-2 XX R XX 6UN X 1

- No. of Pins 02-40
- Contact Plating:
G0=Gold Flash
G1=3u"Gold
G2=5u"Gold
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S1=3u"Gold/Tin
S2=5u"Gold/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SW=Tin
- 6=PA6T
9=PA9T
- Packing
T=Tube+Cap
R=Tape&Reel+Cap

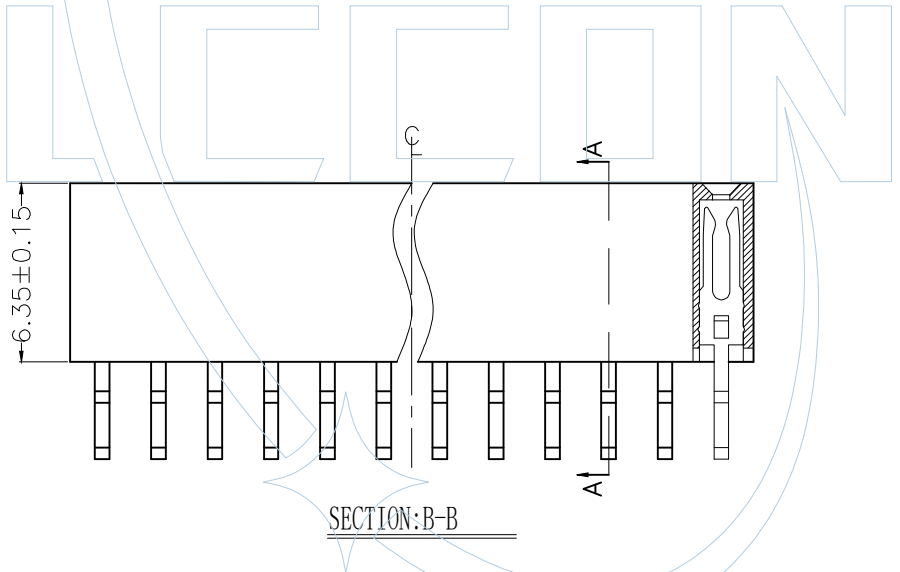

ITEM	Pitch	Mating
Standard	2.0	PHA215/PHA220
Alternate		

				ENGINEERING		DRAW		SCALE	FREE	PART NO.	
				X.X	±0.40	DESIGN		UNIT	mm	FHB263-2XXX6UNX1	
				X.XX	±0.25	CHECK		SIZE	A3	TITLE: 2.0mm排母双排90° H=6.35	
				X.XXX	±0.15	APPROVE		SHEET	1/1	Customer NO.	
				Angle	± 3°			PROJ.	☒		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL				

YLCCON
Dongguan YILI Electronic Technology Co., Ltd

Tel:
FAX:
E-mail:
<http://www.ylccon.cn>