HF

RoHS

NOTES:
Current Rating:.1.0AMP
Withstand Voltage:1000V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze or Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA6T/PA9T/LCP+30%G.F (UL94V-0)

Recommended P.C.B Layout
(PCB BOARD TOLERANCE±0.05)

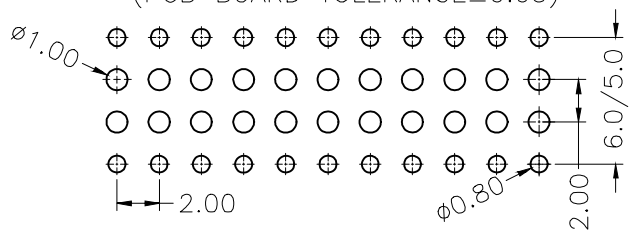

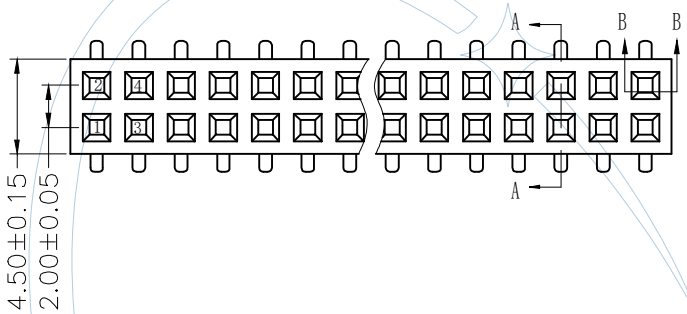

Ordering Information

FHB243-2 XX W XX 6UN X X

- No.of Pins: 02-40
- Contact Plating: G0=Gold Flash; G1=3u"Gold; G2=5u"Gold; G3=10u"Gold; G4=15u"Gold; G5=30u"Gold; S0=Gold Flash/Tin; S1=3u"Gold/Tin; S2=5u"Gold/Tin; S3=10u"Gold/Tin; S4=15u"Gold/Tin; S5=30u"Gold/Tin; SW=Tin
- 6=PA6T; 9=PA9T
- Packing: T=Tube+Cap; R=Tape&Reel+Cap
- Series No.: 1=Type1; 2=Type2

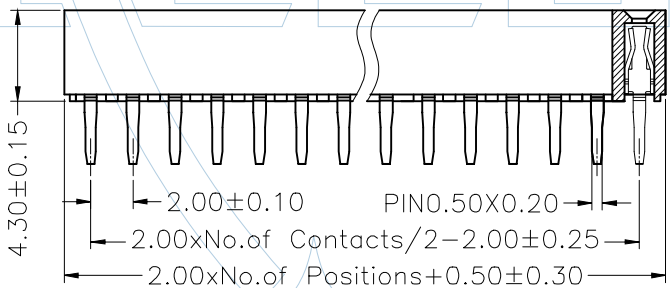

SECTION:B-B



TYPE 2



TYPE 1

SECTION:A-A

ITEM	Pitch	Mating
Standard	2.0	PHA215/PHA220
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

ENGINEERING	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW		
DESIGN		
CHECK		
APPROVE		

SCALE	FREE
UNIT	mm
SIZE	A3
SHEET	1/1
PROJ.	

PART NO.
FHB243-2XXWXX6UNXX

TITLE:
2.0mm排母双排蜈蚣脚
H=4.3

Customer NO.

YLCCON
Dongguan YILI Electronic Technology Co., Ltd

Tel:
FAX:
E-mail:
http:// www.ylccon.cn