


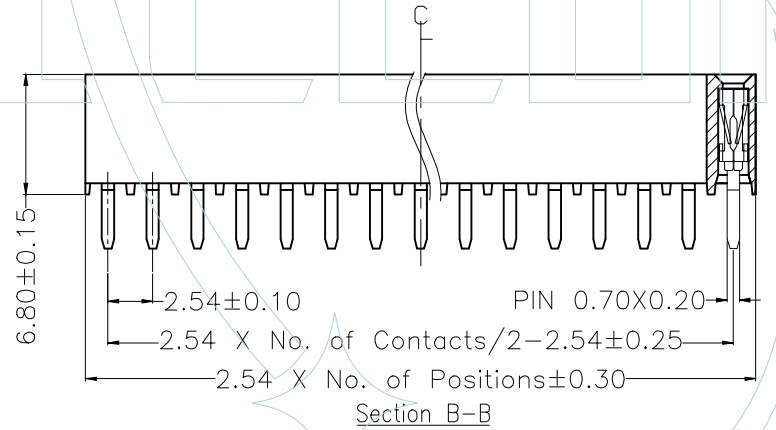


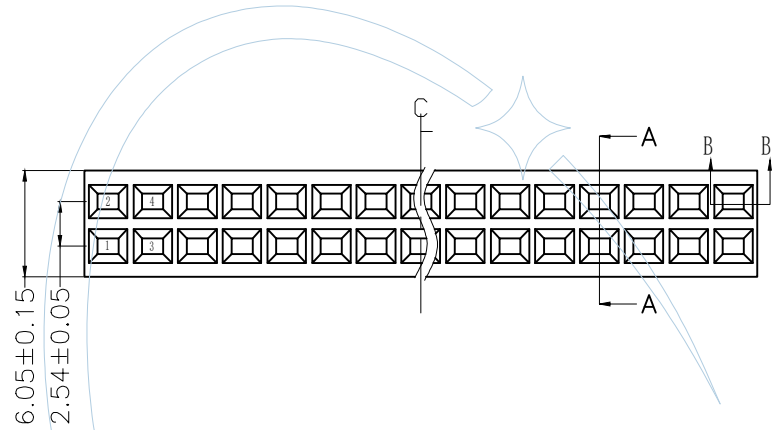

NOTES:
 Current Rating: 1.0AMP
 Withstand Voltage: 1000V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze or Brass
 Contact Plating: Au or Sn over Ni
 Insulator Material: PA6T/PA9T/LCP+30%G.F (UL94V-0)

Recommended P.C.B Layout (TOP Side)
 (PCB BOARD TOLERANCE ±0.05)

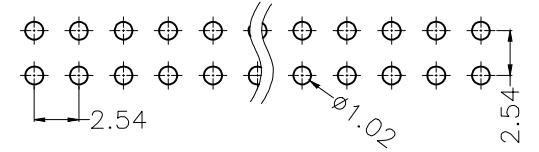

Ordering Information

FHB168-2 XX S XX 6UN X X

No. of Pins
02-40

Contact Plating:
 G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SW=Tin

6=PA6T
 9=PA9T

Packing
T=Tube

ITEM	Pitch	Mating
Standard	2.54	PHA125/PHA120/PHA115
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	ENGINEERING		DRAW	SCALE	FREE	PART NO. FHB168-2XXX6UNXX
					X.X	±0.40				
					X.XX	±0.25	DESIGN	UNIT	mm	TITLE: 2.54mm排母 双排上插式 H=6.8
					X.XXX	±0.15	CHECK	SIZE	A3	Customer NO.
					Angle	± 3°	APPROVE	SHEET	1/1	
					DIM	TOL		PROJ.	☑	

YLCCON
 Dongguan YILI Electronic Technology Co., Ltd
 Tel:
 FAX:
 E-mail:
[http:// www.ylcon.cn](http://www.ylcon.cn)