


HF




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

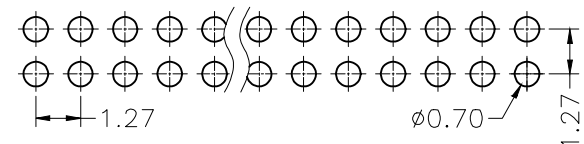

NOTES:
Current Rating:.1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze or Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA6T/PA9T/LCP+30%G.F (UL94V-0)

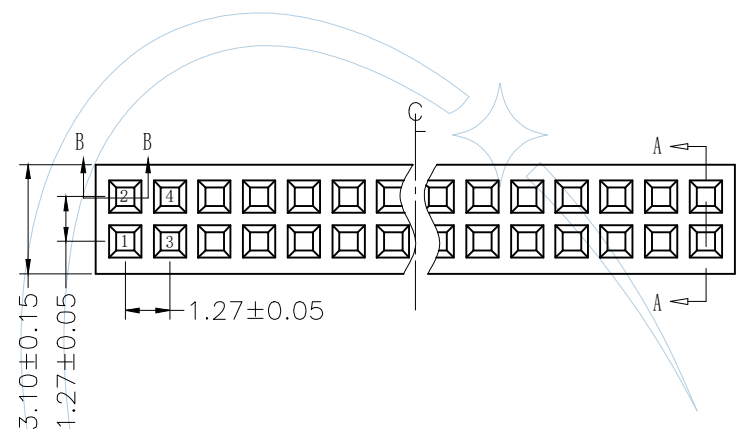

Ordering Information



FHB343-2 XX M XX 6UN X 1

No. of Pins
02-40

Contact Plating:
G0=Gold Flash
G1=3u"Gold
G2=5u"Gold
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S1=3u"Gold/Tin
S2=5u"Gold/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SW=Tin

6=PA6T
9=PA9T

Packing
A=Tray
T=Tube

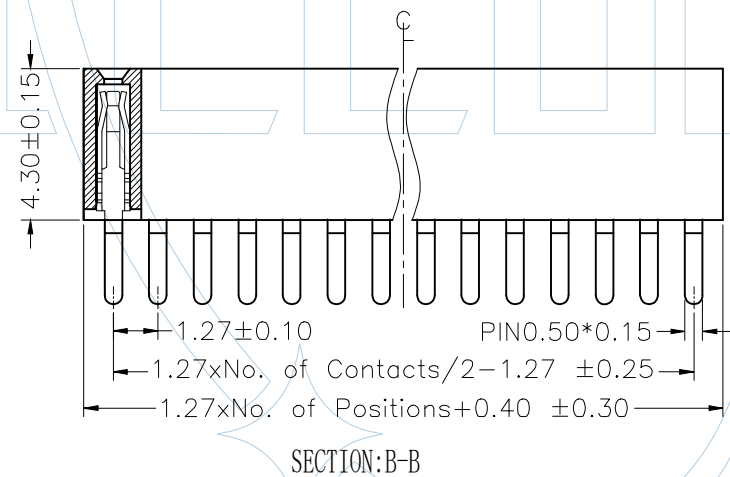

ITEM	Pitch	Mating
Standard	1.27	PHA325/BHC131
Alternate		

				ENGINEERING		DRAW		SCALE	FREE	PART NO.	 Dongguan YILI Electronic Technology Co., Ltd Tel: FAX: E-mail: http:// www.ylccon.cn
				X.X	±0.40	DESIGN		UNIT	mm	TITLE:	
				X.XX	±0.25	CHECK		SIZE	A3	1.27mm排母双排180° H=4.3	
				X.XXX	±0.15	APPROVE		SHEET	1/1	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE			PROJ.			