




Notes:
 1. Material:
 Housing: Thermoplastic UL 94V-0 , Black
 Contact: Copper Alloy
 2. Finish: Plating Selective Gold
 3. Specification
 Current Rating: 7A
 Instant Current: 10A
 Contact Resistance: 30mΩ
 Insulation Resistance: 100MΩ
 Dielectric Voltage: 500V
 Operating Temperature: -40° C ~105° C
 4. Order Information:

Ordering Information

BBF918-67 XX XX S L T 1

No. of Pins
03-08

Contact Plating
 G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold

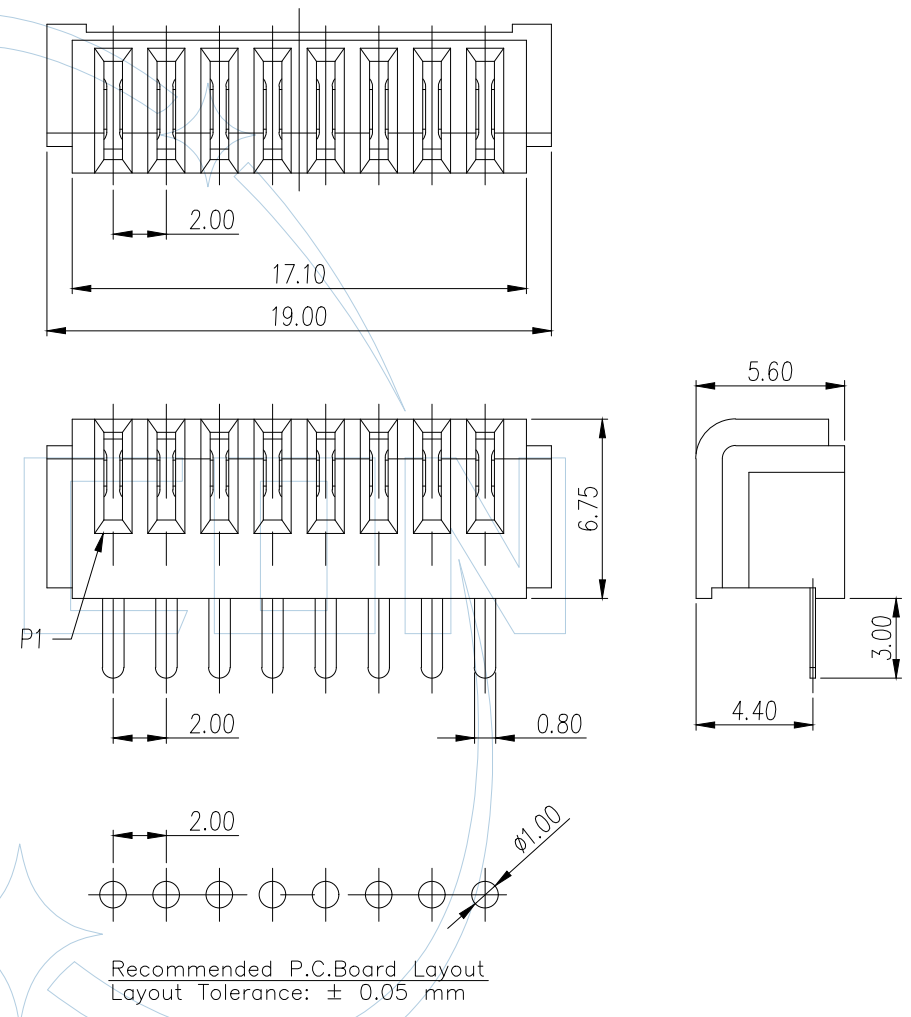

Recommended P.C.Board Layout
 Layout Tolerance: ± 0.05 mm

ITEM	Pitch	Mating
Standard	2.0	BBF918
Alternate		

				ENGINEERING		DRAW		SCALE	FREE	PART NO. BBF918-67XXXXSLT1	
				X.X	±0.40	DESIGN		UNIT	mm	TITLE: 2.0mm刀片电池座 H=6.75 W=5.6	
				X.XX	±0.25	CHECK		SIZE	A3	Customer NO.	
				X.XXX	±0.15	APPROVE		SHEET	1/1		
				Angle	± 3°			PROJ.	☒		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE						

YILCCON
 Dongguan YILI Electronic Technology Co., Ltd
 Tel:
 FAX:
 E-mail:
[http:// www.ylconn.cn](http://www.ylconn.cn)