

HF



RoHS

Notes:

1. Material:

Housing: Thermoplastic UL 94V-0 , Black

Contact: Copper Alloy

2. Finish: Plating Selective Gold

3. Specification

Current Rating: 7A

Instant Current: 10A

Contact Resistance: 30mΩ

Insulation Resistance: 100MΩ

Dielectric Voltage: 500V

Operating Temperature: -40° C ~105° C


4. Order Information:

Ordering Information

BBF916-98 XX XX S L R 2

No. of Pins  
03-08

Contact Plating  
G0=Gold Flash  
G1=3u"Gold  
G2=5u"Gold  
G3=10u"Gold  
G4=15u"Gold  
G5=30u"Gold

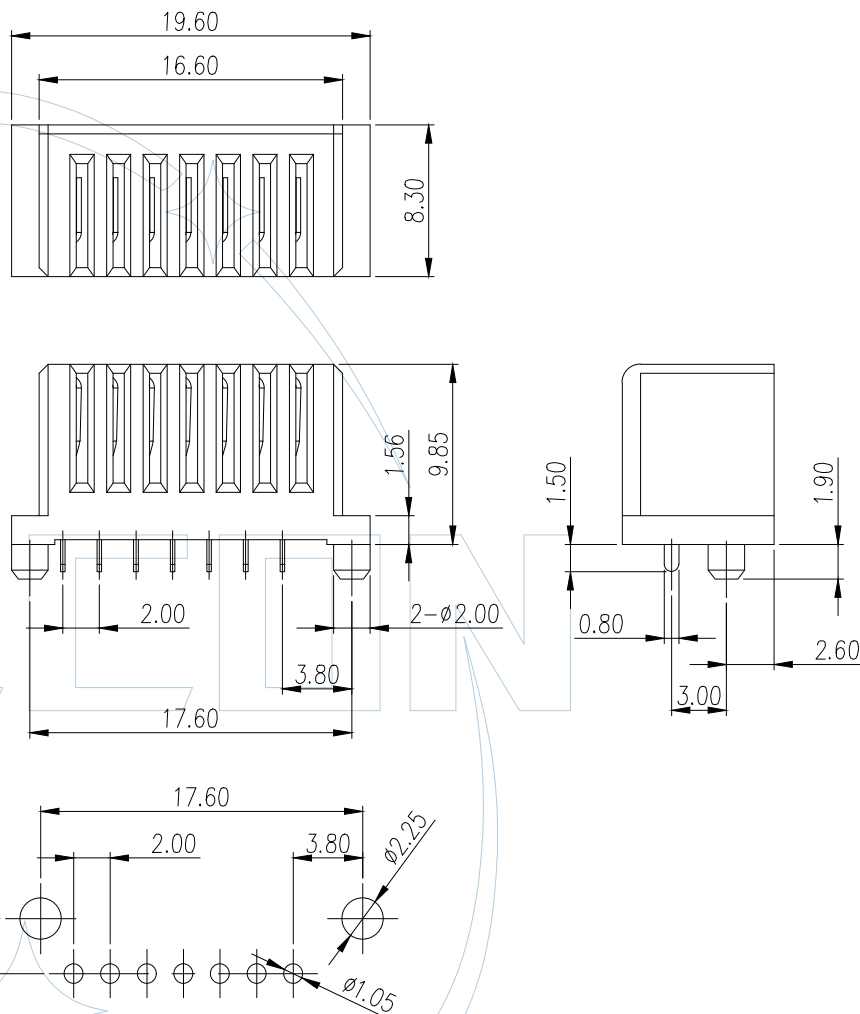

Recommended P.C.Board Layout  
Layout Tolerance: ± 0.05 mm

ITEM	Pitch	Mating
Standard	2.0	BBF916
Alternate		

				ENGINEERING		DRAW		SCALE	FREE	PART NO. BBF916-98XXXXSLR2		<b>YLCCON</b> Dongguan YILI Electronic Technology Co., Ltd
				X. X	±0.40	DESIGN		UNIT	mm	TITLE: 2.0mm刀片电池座 H=9.85 W=8.3 180° 插板		
								SIZE	A3	Customer NO.		Tel: FAX: E-mail: http:// www.ylconn.cn
								SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	APPROVE		PROJ.				