


HF



RoHS

Specification:
 Current Rating: 2.0A;
 Current Voltage: 12V;
 Withstand Voltage: 500V;
 Contact Resistance: 30mΩ MAX
 Insulation: Resistance: 500MΩ;
 Working Temperature: -40°C~+85°C;
 Housing Material: LCP
 Contact Material: Phosphor Brass,
 Contact Area plated Au 3u"
 Life Time: Over 5000times;

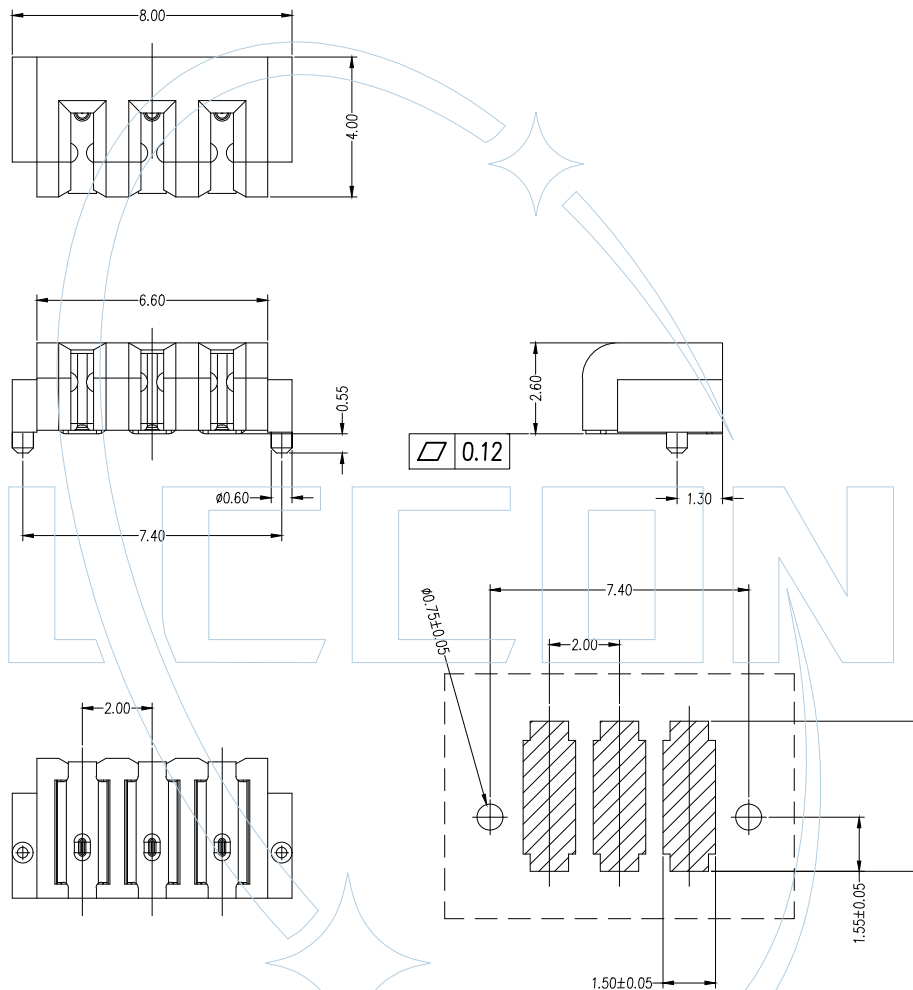


Ordering Information

BBF913-26 XX XX M L R 2

No. of Pins
03-08

Contact Plating
 G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold

Recommended P.C.Board Layout
 Layout Tolerance: ±0.05mm



ITEM	Pitch	Mating
Standard	2.0	BWM91
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

ENGINEERING		DRAW	SCALE	FREE	PART NO. BBF913-26XXXXMLR2
X.X	±0.40				
X.XX	±0.25	DESIGN	UNIT	mm	TITLE: 2.0mm刀片电池座 H=2.6 W=4.0 立贴带柱卷装
X.XXX	±0.15	CHECK	SIZE	A3	Customer NO.
Angle	± 3°	APPROVE	SHEET	1/1	
DIM	TOL		PROJ.		

--	--

YLCCON
 Dongguan YILI Electronic Technology Co., Ltd

Tel:
 FAX:
 E-mail:
[http:// www.ylconn.cn](http://www.ylconn.cn)